


Verso S 3000 F C5

Maximum air flow, m ³ /h	3800
Maximum air flow, l/s	1056
Electric power input of the fan drive at maximum flow rate, W	680
Filters dimensions B×H×L, mm	450×480×96
Unit dimensions B×H×L, mm	1015×555×1160
Panel thickness, mm	50
Maintenance space, mm	600
Unit weight, kg	130

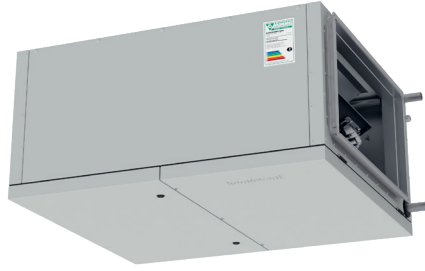

Acoustic data

A-weighted sound power level L_{WA} , dB(A)
at nominal flow rate

Supply inlet	68
Supply outlet	77
Casing	53


A-weighted sound pressure level L_{PA} , dB(A)
10 m² normally isolated room, distance from casing – 3 m.

Surroundings	41
--------------	----

Technical data

Supply air handling unit	Supply voltage, V	Air heater capacity, kW	Maximal operating current, A	ΔT, °C
Verso S 3000 F-HW	3~400	–	3,8	–

Performance

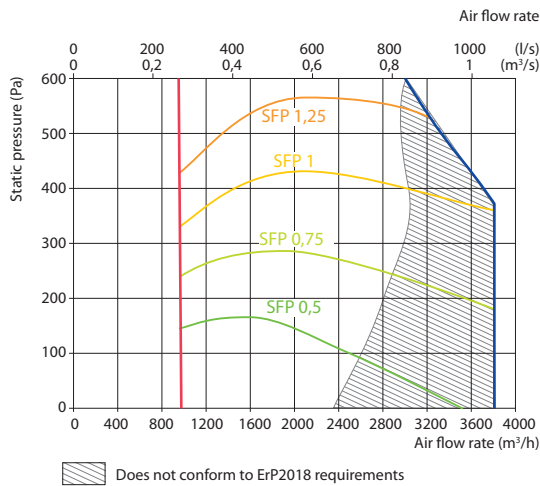


Hot water air heater


Water temperature in/out, °C	80/60	70/50	60/40
Capacity, kW	35,4	35,4	35,4
Flow rate, dm ³ /h	1557	1550	1509
Pressure drop, kPa	3,3	3,3	3,3
Temperature in/out, °C	-5 / 22,0	-5 / 22,0	-5 / 22,0
Maximal capacity, kW	54,4	46,1	37,7
Connection, "	1		

Accessories

Closing damper	SRU-M-800x400+LF24/LM24
Silencer	ODA STS-IIM1BY-800-400-700-S
	SUP STS-8P8B8B-800-400-900-S
PPU	PPU-HW-3R-25-6.3-W2
Water cooler	DCW-3,0-20
2-way valve	VVP45.25-6,3+SSB161.05HF
DX cooler	DCF-3,0-20-2
Cooling unit	2xMOU-36HFN8a+KA8142

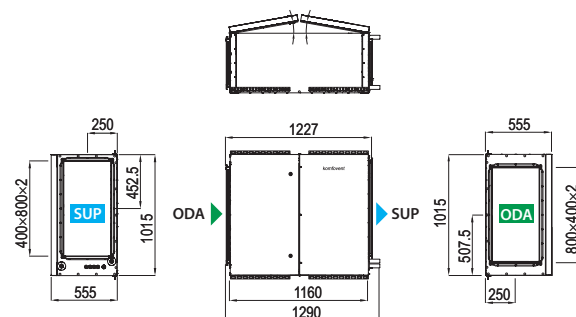

Mounting positions



ODA – outdoor intake

SUP – supply air

ETA – extract indoor

EHA – exhaust air