



Verso R 1000 F C5

Nominal air flow according to ErP 2018, m ³ /h	890
Nominal air flow according to ErP 2018, l/s	247
Electric air heater capacity, kW / Δt, °C	2/5,9
Supply voltage HE, V	1~230
Supply voltage HW, V	1~230
Maximal operating current HE, A	12,9
Maximal operating current HW, A	4,5
Power supply cable E, mm ²	3×1,5
Power supply cable W, mm ²	3×1,5
Electric power input of the fan drive at maximum flow rate, W	267
Noise power level, L _{WA} , dB(A)	55
Noise pressure level, L _{PA} , dB(A), (3 m)	44
Filters dimensions B×H×L, mm	410×420×46
Supply filter class	ePM1 60 (F7)
Exhaust filter class	ePM10 50 (M5)
Unit dimensions B×H×L, mm	930×476×1349
Panel thickness, mm	45
Maintenance space, mm	400
Unit weight, kg	140

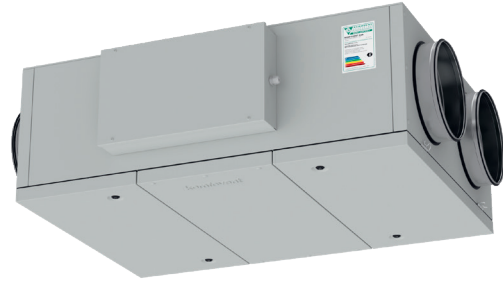

Performance

Verso R 1000 F with standard equipment

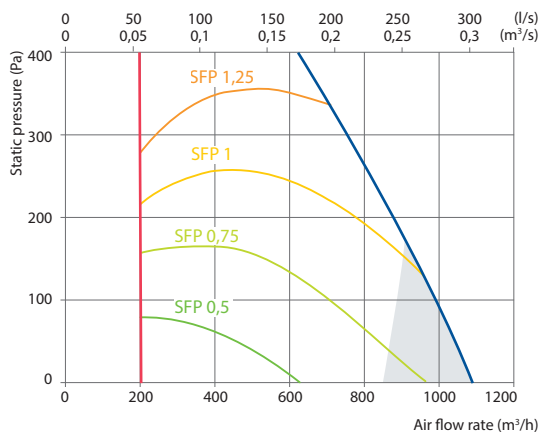


Does not conform to ErP2018 requirements

Accessories

Closing damper	AGUJ-M-315+LF24/LM24
Silencer	ODA/EHA AGS-315-100-900-M
	SUP/ETA AGS-315-100-1200-M
Water heater	DH-315
PPU	PPU-HW-3R-15-1,0-W2
Water cooler	DCW-1,2-8
Water heater-cooler	DHCW-315
2-way valve	VVP47.15-2,5+SSF161.05HF
DX cooler	DCF-1,2-8
Cooling unit for ducted cooler	MOU-24HFN8a+KA8142

Mounting positions



Temperature efficiency

	Winter					Summer		
Outside temperature, °C	-23	-15	-10	-5	0	25	30	35
After heat exchanger, °C	14	15,4	16,3	17,2	18,1	22,5	23,4	24,3

Indoor +22 °C, 20 % RH


Hot water duct air heater *

	Winter		
Water temperature in/out, °C	80/60	70/50	60/40
Capacity, kW	2,4	2,4	2,4
Flow rate, dm ³ /h	106	106	106
Pressure drop, kPa	2,4	2,4	2,4
Temperature in/out, °C	14 / 22,0		
Maximal capacity, kW	9,9	8,0	6,1
Connection, "	½		


* Option

Shown as right (R1)

View from inspection side

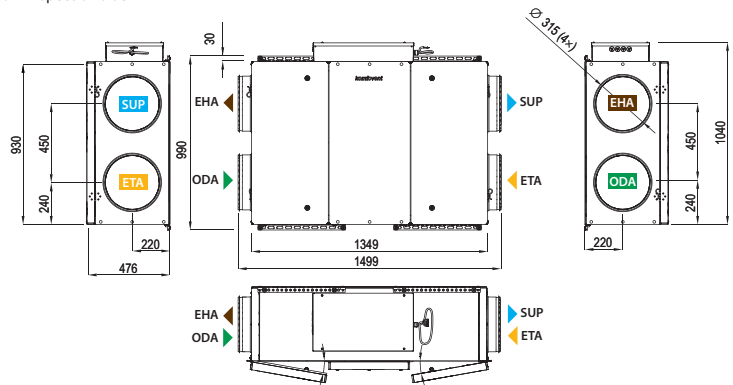

Shown as left (L1)

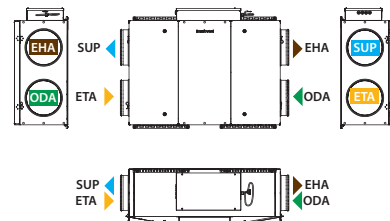

ODA – outdoor intake

SUP – supply air

ETA – extract indoor

EHA – exhaust air